

KNOWLEDGE BASE · PUBLIC DOCUMENT

An open DNS resolver on your VPS: why it is used in attacks and how to turn off recursion

Security

CODE

RLX-INT-KB-6846

VERSION

v2026.10.21

COUNTRY · LANGUAGE


International · English

MozOut International

RLX Holdings (Pty) Ltd. · Group RLX Holdings

Tax no. (SARS) 943 907 6234 · Registration no. (CIPC) 2025/667953/07

<https://www.my.mozout.com/knowledgebase/6846>

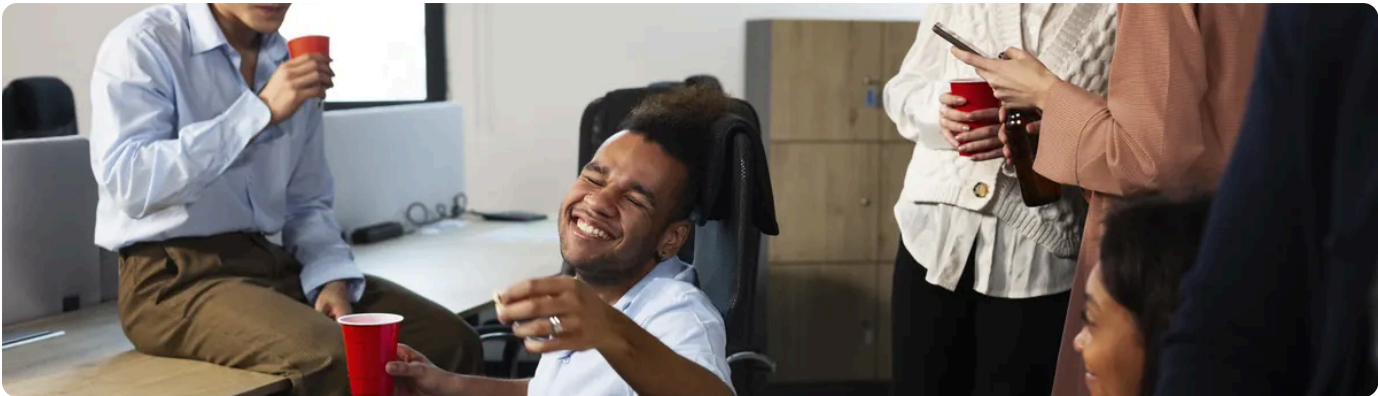

For VPS and dedicated server customers with root access. The short answer: an open DNS resolver answers questions about **any** domain from **any** address on the internet, on port **53**. Attackers send it small queries with a forged source address (the victim's), and your server sends the victim much larger answers: an amplification attack, and your VPS takes part without ever being hacked. A national incident response team (CERT) finds these resolvers and our network and data centre provider sends us the notice. The fix is to turn off **recursion** for outsiders, or the whole service if you do not need it, without breaking DNS for any domains the server hosts.

What may be answering on port 53

What runs	What to do
BIND (<code>named</code>), installed by a panel or by hand as the name server for your domains	Keep it answering for your domains, with recursion off (or allowed only for the server itself).
BIND or Unbound installed just so the server can resolve names	Make it listen on 127.0.0.1 only and refuse everyone else.
dnsmasq, Pi-hole or AdGuard Home in a container with port 53 published	Stop publishing it to the outside, or limit it in the firewall to the addresses that use it (your VPN, for example).
systemd-resolved on <code>127.0.0.53</code>	Not an open resolver: it only listens locally. Leave it alone.
A process you do not recognise	Treat it as suspicious: is my VPS compromised?

Closing the resolver

1

See what listens on port 53: `sudo ss -tulnp | grep ":53 "`

Addresses `0.0.0.0` , `:::` or the public IP mean it answers the outside world.

2

Test from another machine: `dig @YOUR_SERVER_IP example.com` . An address in the ANSWER section and the `ra` flag mean the resolver is open. `status: REFUSED` or a timeout means it is closed. Reading the output: **dig and nslookup**.

3

Ask whether this server needs DNS at all. Check where your domains point with `dig NS yourcompany.com` . If they use the registrar's name servers or another service, not this VPS, you can switch the service off:
`sudo systemctl disable --now named` (or `bind9` , `unbound` , `dnsmasq` , whichever is running).

4

BIND serving your domains: inside the existing `options` block (`/etc/bind/named.conf.options` on Debian and Ubuntu; `/etc/named.conf` on the Red Hat family), add: `recursion no;` `allow-query-cache { none; };` If the server itself uses BIND to resolve names, use this instead: `allow-recursion { 127.0.0.1; ::1; };` `allow-query-cache { 127.0.0.1; ::1; };` Check and restart: `sudo named-checkconf`
`sudo systemctl restart named` (on older Debian and Ubuntu releases the service is `bind9`).

5

Unbound: in the `server:` section of `unbound.conf` : `interface:`
`127.0.0.1`
`access-control: 0.0.0.0/0 refuse`
`access-control: 127.0.0.0/8 allow` Then `sudo unbound-checkconf`
`sudo systemctl restart unbound`

6

dnsmasq or a container: for dnsmasq, `listen-address=127.0.0.1`
and `bind-interfaces` . For a container, change `"53:53/udp"` to
`"127.0.0.1:53:53/udp"` (and the same for tcp), or drop the mapping,
then `docker compose up -d` . Remember that ufw does not stop ports
published by Docker: **Docker on a VPS, safely.**

7

Repeat the step 2 test from outside and keep the output for your report.

8

Reply to the support ticket in My MozOut, within the notice's deadline
(short, often a single day), with a short report: the cause, what you
changed and how you checked that the port no longer answers from
outside. There is a template in **writing the reply to an abuse notice.**
With no reply, or if the problem carries on, the server may be switched off
to protect the network, with your data left intact: **why a server is
switched off and how to bring it back.**

**Do not close port 53 or stop BIND on a server that is the name server for
your domains:** the websites and e-mail of those domains can no longer be found.
On a name server, 53 stays open (UDP and TCP) and what you close is recursion.
Copy the configuration files before editing them.

This notice does not mean the server was hacked: an open resolver is abused from outside, just as it is. A reply to the notice is still required, and the attack traffic stops once recursion is closed. On a VPS, root access is yours: we do not log in to the server and cannot change a firewall that runs inside it. If you lose SSH, tell us in the support ticket.

Not sure whether your VPS is the name server for your domains? Tell us the domains and the step 1 output in the support ticket.

[Open a support ticket](#)

SEE ALSO

An abuse notice about your server: what it means, the deadline and what we need from you

Writing the reply to an abuse notice: cause, what you removed and how it will not happen again

Checking DNS from the command line: dig and nslookup, and how to read the answer

Setting up the ufw firewall on Ubuntu without locking yourself out

Running Docker on a VPS safely: the precautions that matter

A DDoS attack coming from your server: finding the outgoing flood and stopping it



Online version of this document

MozOut is a leading internet services company, with a mission to help businesses to be born and prosper through technology.

2020

FOUNDED

37,000+

CLIENTS

130+

SIGN-UPS A DAY

MozOut International

RLX Holdings (Pty) Ltd. • Group RLX Holdings

TAX NO. (SARS)

943 907 6234

REGISTRATION NO.
(CIPC)

2025/667953/07

REGISTERED OFFICE

1111 Olive Street
Saint Louis 63101, Missouri, United States

CONTACT

info@mozout.com • +27 78 823 3325 • www.mozout.com

OPENING HOURS

Monday to Friday - 08 AM to 04 PM
Saturday & Sunday - Closed