Mozout

Generated on 28/11/2026 21:20

KNOWLEDGE BASE · PUBLIC DOCUMENT

Any app that accepts an OpenAI-compatible address: the base URL, the key and the model id

Integrations & VPS Agents

CODE	VERSION	COUNTRY · LANGUAGE
RLX-INT-KB-9306	v2026.11.28	International · English

MozOut International
RLX Holdings (Pty) Ltd. · Group RLX Holdings
Tax no. (SARS) 943 907 6234 · Registration no. (CIPC) 2025/667953/07

https://www.my.mozout.com/knowledgebase/9306

Any app that accepts an OpenAI-compatible address: the base URL, the key and the model id

Integrations & VPS Agents Created on **November 28, 2026** 3 min read

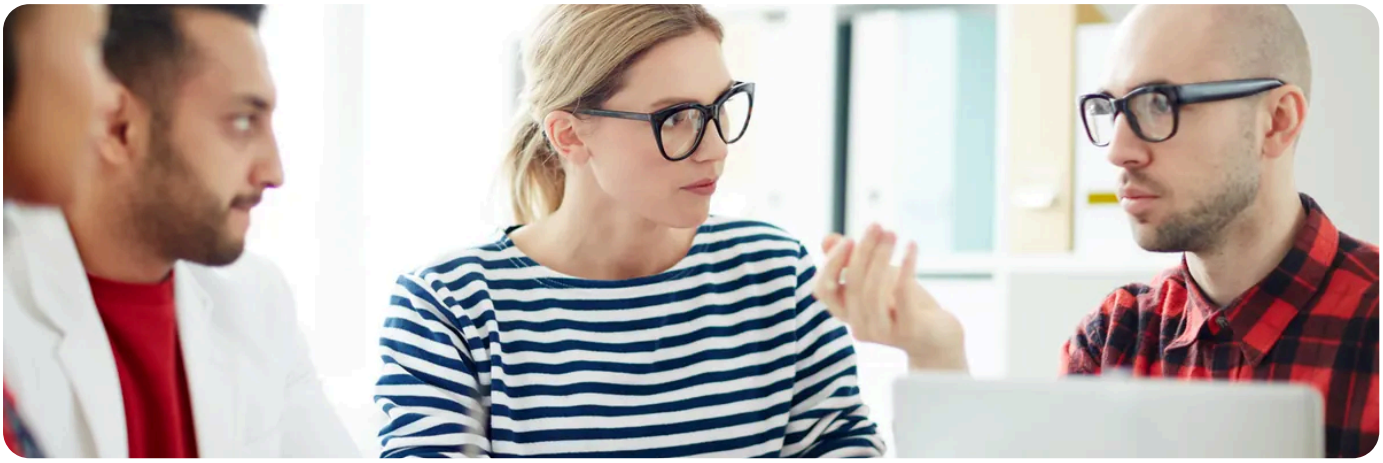

Many apps let you swap the OpenAI address for another one: chat clients, extensions, plugins, automation tools. If the app accepts an OpenAI-compatible address, it can use All in One AI models. You fill in three fields and that is it.

Before you start

1. Create a key in the **API Center** with the `ai:read` and `ai:write` permissions. Use a `sandbox_` key to check the setup without spending and a `prod_` key to work. The fields are explained in **creating an API key**.

2. Have AI credits or an active Coding Plan in **All in One AI**.

The three fields

Field	Common names	What to enter
Base address	Base URL, API Base, Endpoint	`https://api.mozout.com/v1`
Key	API Key, Token	The `prod_` or `sandbox_` key
Model	Model, Model ID	The catalogue id, with the slash, such as `deepseek-ai/deepseek-v4-flash`; or `agent/` and the id of one of your agents

The address ends in `/v1`. The app adds `/chat/completions` or `/models` by itself. Without `/v1`, or with `/v1` twice, the API answers `404` with `not_found`.

The model id

The ids are in the Models tab of **All in One AI** or in the API list. On Linux and macOS:

```
curl "https://api.mozout.com/v1/models?type=text" -H "Authorization: Bearer $MOZOUT_API_KEY"
```

In Windows PowerShell:

```
curl.exe "https://api.mozout.com/v1/models?type=text" -H "Authorization: Bearer $env:MOZOUT_API_KEY"
```

Each model comes with its `id` (always with the slash), its `context_length` and its price in `pricing`. Listing the models spends no credits.

Many apps ask for this list to fill a drop-down or to test the key. If the drop-down shows image, video or voice models, choose by id: the chat only accepts text models and agents. To use an agent, see **the agent as the model**.

Apps made for other formats

Format	Base address
OpenAI (Chat Completions)	`https://api.mozout.com/v1`
OpenAI (Responses)	`https://api.mozout.com/v1`
Anthropic (Messages)	`https://api.mozout.com`, without `/v1`

Most apps use the first one. An app made for Claude uses the Anthropic format, and then the address has no `/v1`.

If it does not work

Answer	What to do
`401 unauthorized`	The key is missing or wrong, or the app did not read the variable. Check the key.
`404 not_found`	The address is wrong. Check the `/v1`.
`404 model_not_found`	The id is incomplete or has no slash. Copy it from the list.
`402 insufficient_credits`	The credits do not cover the reservation. Buy credits or lower the app's maximum output.
`403 insufficient_scope`	The key does not have `ai:write`.

If the app uses tools (function calling), choose a model that supports them: the ones in the **Recommended models** table of the docs do.

RECOMMENDED

Want All in One AI models in the app you already use? See All in One AI.

See All in One AI →

SEE ALSO

- Using the OpenAI SDK with All in One AI: only the address and the key change
- Cursor, Codex CLI, Cline and other coding tools: the right address and model in each
- Using your agent in n8n or another OpenAI-compatible app: agent/ as the model
- Creating an API key: name, mode, permissions, validity, IP list and spending limit
- All in One AI

MozOut International

RLX Holdings (Pty) Ltd. · Group RLX Holdings

TAX NO. (SARS)	943 907 6234
REGISTRATION NO. (CIPC)	2025/667953/07
REGISTERED OFFICE	1111 Olive Street Saint Louis 63101, Missouri, United States
CONTACT	info@mozout.com · +27 78 823 3325 · www.mozout.com
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-INT-KB-9306 · v2026.11.28 · Generated on 28/11/2026 21:20