Mozout

Generated on 28/11/2026 21:34

KNOWLEDGE BASE · PUBLIC DOCUMENT

How Codex carries on a conversation: responses kept for 30 days

Codex CLI


CODE	VERSION	COUNTRY · LANGUAGE
RLX-INT-KB-9492	v2026.11.28	International · English

MozOut International
RLX Holdings (Pty) Ltd. · Group RLX Holdings
Tax no. (SARS) 943 907 6234 · Registration no. (CIPC) 2025/667953/07

https://www.my.mozout.com/knowledgebase/9492

How Codex carries on a conversation: responses kept for 30 days

Codex CLI Created on **November 28, 2026** 2 min read

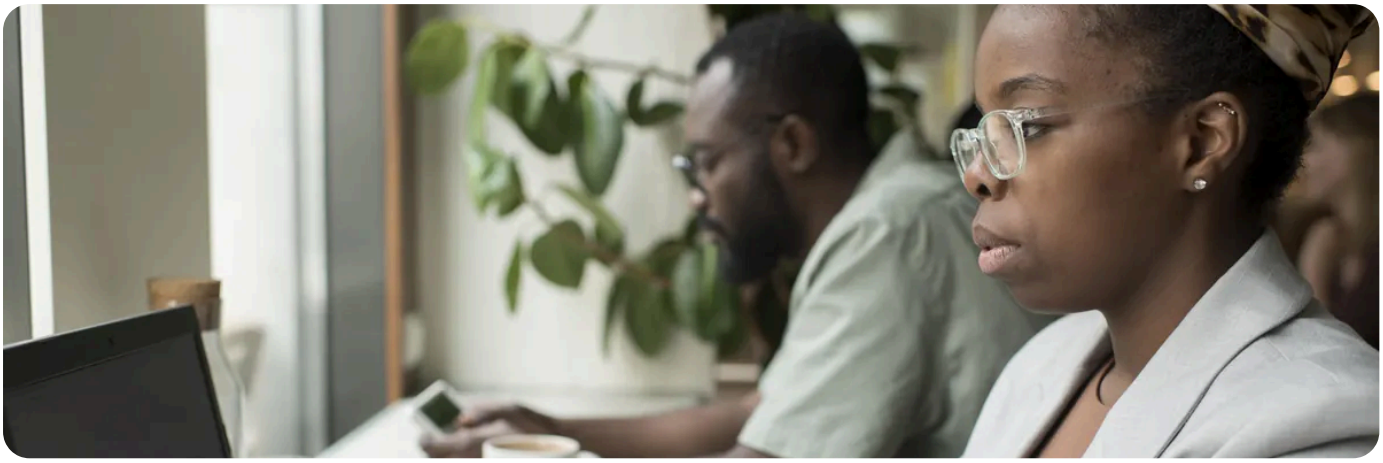

Codex talks to our API in the Responses format. In this format, each response has an id and is kept on our side for 30 days. That is how Codex can carry on a conversation without sending everything again.

How it works

1. Each response comes with an `id` that starts with `resp_`.
2. In the next request, Codex can send that id in `previous_response_id`. That way it carries on the conversation without sending it again.
3. The response is kept for 30 days. After that, it no longer exists.

Who can see a response

Only the account that made it. You can read it with `GET /v1/responses/{id}`, using a key with `ai:read`. It comes back exactly as it was returned. After 30 days, the answer is `404`.

```
curl "https://api.mozout.com/v1/responses/resp_..." -H "Authorization: Bearer $MOZOUT_API_KEY"
```

In Windows PowerShell, use `curl.exe` and `$env:MOZOUT_API_KEY`.

Codex's own sessions

Codex also has its own sessions. To go back to one, the official documentation gives:

Command	What it does
`codex resume`	Continues an earlier session by its id, or the most recent one.
`/resume`	Inside Codex, resumes a chat from the session list.
`/new`	Starts a new chat in the same session, without the earlier context.

A response older than 30 days no longer exists on our side. To pick up old work, start with `/new` and give Codex the context it needs.

What is charged

Each request pays for the tokens counted in `usage`, at the model price, or in Coding Plan points for the models in the plan. The prices are in the **Models tab**.

! An account key with `ai:read` can read the saved responses. If a key leaks, revoke it at once: see **what to do, in the right order**.

RECOMMENDED

Want to code with AI in Codex? Visit the Coding with AI page.

See Coding with AI →

SEE ALSO

- **Codex CLI with All in One AI: creating config.toml, the key and the model** →
- **wire_api = "responses" in Codex: what it means and why it stays in the file** →
- **Errors in Codex CLI: the OpenAI format and the code field** →
- **An API key or token has leaked: what to do, in the right order** →
- **Coding with AI in All in One AI** →

Mozout

MozOut International

RLX Holdings (Pty) Ltd. · Group RLX Holdings

TAX NO. (SARS)	943 907 6234
REGISTRATION NO. (CIPC)	2025/667953/07
REGISTERED OFFICE	1111 Olive Street Saint Louis 63101, Missouri, United States
CONTACT	info@mozout.com · +27 78 823 3325 · www.mozout.com
OPENING HOURS	Monday to Friday - 08 AM to 04 PM Saturday & Sunday - Closed

Online version of this document

RLX-INT-KB-9492 · v2026.11.28 · Generated on 28/11/2026 21:34